


Overview


HP COMPAQ PRO 6300 SMALL FORM FACTOR BUSINESS PC

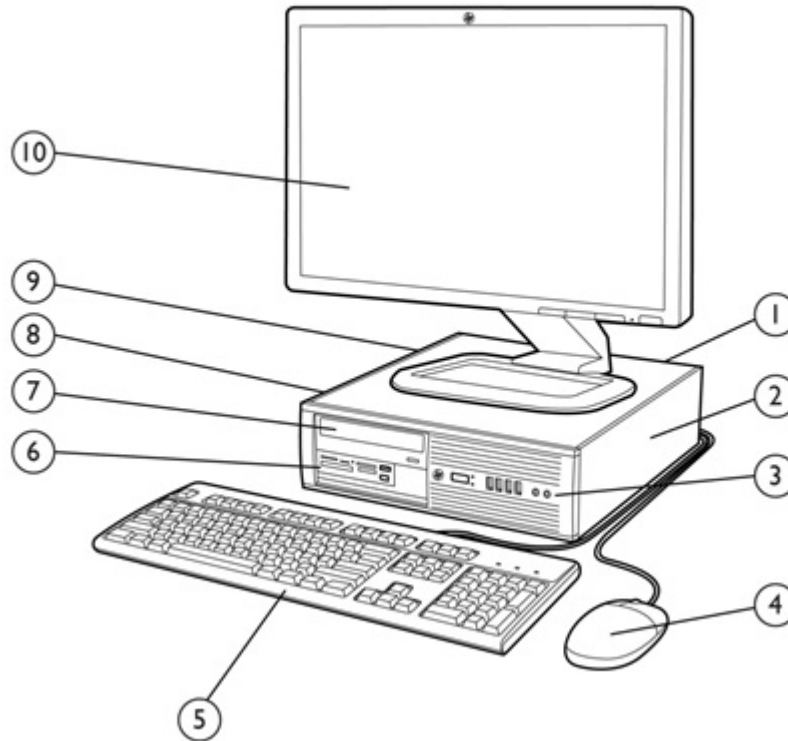

- 1 Rear I/O includes (4) USB 3.0 ports, (2) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort 1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 2 Low-profile expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 3 Front I/O includes (4) USB 2.0 ports, a headphone output and a microphone jack
- 4 HP Mouse
- 5 HP Keyboard
- 6 3.5" external drive bay supporting an optional media card reader or a secondary data drive
- 7 5.25" external drive bay supporting an optical disk drive
- 8 3.5" internal drive bay supporting primary data drive
- 9 240W standard efficiency or 90% high efficiency power supply
- 10 HP Monitor (sold separately)

Overview

HP COMPAQ PRO 6300 MICROTOWER BUSINESS PC

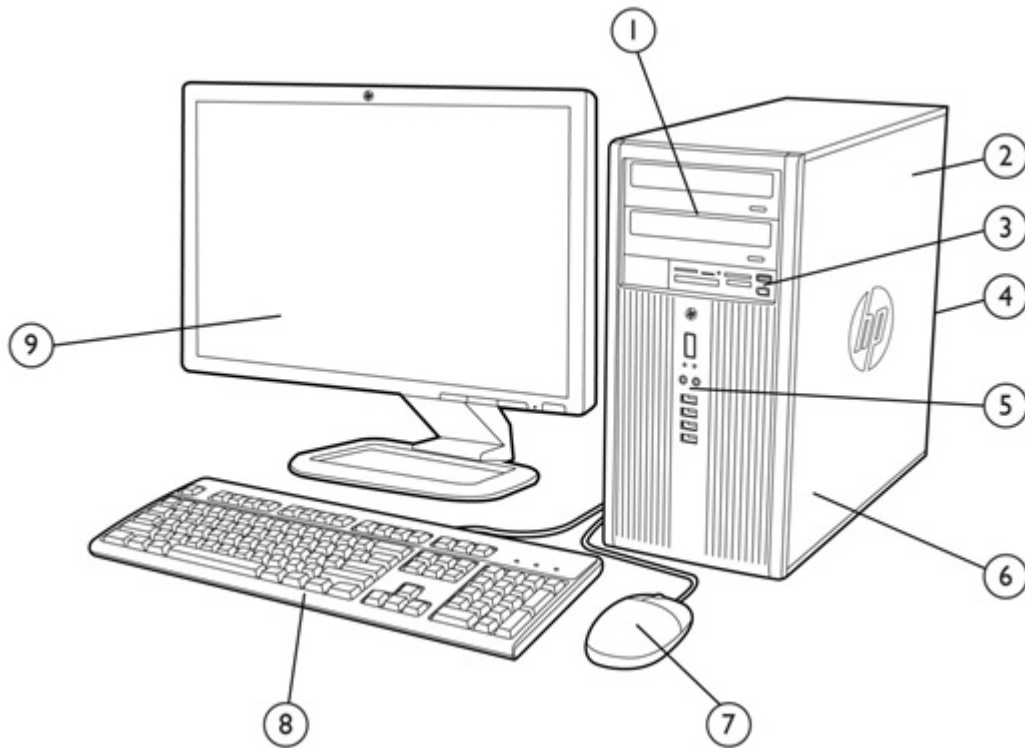

- 1 (2) 5.25" external drive bays supporting optical disk drives or removable hard disk drives
(2) 3.5" internal drive bays supporting data drives
- 2 320W standard efficiency or 90% high efficiency power supply
- 3 3.5" external drive bay supporting the optional HP Media Card Reader
- 4 Rear I/O includes (4) USB 3.0 ports, (2) USB 2.0 ports, serial port, PS/2 mouse and keyboard ports, RJ-45 network interface, DisplayPort 1.1a and VGA video interfaces, and 3.5mm audio in/out jacks
- 5 Front I/O includes (4) USB 2.0 ports, a headphone output and a microphone jack
- 6 Full-height expansion slots include (1) PCI, (2) PCI Express x1 and (1) PCI Express x16 graphics
- 7 HP Mouse
- 8 HP Keyboard
- 9 HP Monitor (sold separately)

Overview

At A Glance

- Choice of two professional chassis form factors: Small Form Factor and Microtower.
- PC chassis and all internal components and modules are 100% free of brominated flame retardants (BFRs) and Polyvinyl Chloride (PVC).
- UEFI BIOS developed and engineered by HP for better security, manageability and software image stability
- Intel Q75 Express chipset supporting Intel 2nd and 3rd generation Core processors featuring Intel HD Graphics
- Intel 82579LM GbE integrated network connection
- DDR3 Synchronous Dynamic Random Access Memory (SDRAM)
- Dual independent monitor support via VGA and digital DisplayPort 1.1a video interfaces
- Standard efficiency or 90% high efficiency energy saving power supplies available
- ENERGY STAR® qualified models certified EPEAT® Gold
- Guaranteed lengthy purchase lifecycles and image stability
- Software image fully compatible across all models and form factors
- Created using industry leading Design for Environment standards
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/97688-0-0-225-121.aspx>)
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Tool-less serviceability features for easier upgrades and repairs

Standard Features and Configurable Components (availability may vary by country)

OPERATING SYSTEMS

Preinstalled

Genuine Windows® 7 Ultimate (32-bit or 64-bit)
Genuine Windows® 7 Professional (32-bit or 64-bit)
Genuine Windows® 7 Home Premium (32-bit or 64-bit)
Genuine Windows® 7 Home Basic (32-bit)
FreeDOS

CHIPSET

Intel® Q75 Express

PROCESSOR

Intel® 3rd Generation Core™ i7 Processors

Intel® Core™ i7-3770 Processor

Up to 3.9 GHz turbo boost frequency, 8 MB cache, 4 cores, 8 threads
Intel HD Graphics 4000
Supports DDR3 memory up to 1600 MT/s data rate
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)

Intel® 3rd Generation Core™ i5 Processors

Intel® Core™ i5-3570 Processor

Up to with 3.8 GHz turbo boost frequency, 6 MB cache, 4 cores, 4 threads
Intel HD Graphics 2500
Supports DDR3 memory up to 1600 MT/s data rate
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)

Intel® Core™ i5-3470 Processor

Up to with 3.6 GHz turbo boost frequency, 6 MB cache, 4 cores, 4 threads
Intel HD Graphics 2500
Supports DDR3 memory up to 1600 MT/s data rate
Supports Intel vPro Technologies and Intel's Stable Image Platform Program (SIPP)

Intel® 2nd Generation Core™ i3 Processors

Intel® Core™ i3-2130 Processor

3.4 GHz base frequency, 3 MB cache, 2 cores, 4 threads
Intel HD Graphics 2000
Supports DDR3 memory up to 1333 MT/s data rate

Intel® Core™ i3-2120 Processor

3.3 GHz base frequency, 3 MB cache, 2 cores, 4 threads
Intel HD Graphics 2000
Supports DDR3 memory up to 1333 MT/s data rate

Intel® Pentium® Processors

Intel® Pentium® G870 Processor

3.1 GHz base frequency, 3 MB cache, 2 cores, 2 threads
Intel HD Graphics
Supports DDR3 memory up to 1333 MT/s data rate

Standard Features and Configurable Components (availability may vary by country)

Intel® Pentium® G860 Processor

3.0 GHz base frequency, 3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1333 MT/s data rate

Intel® Pentium® G640 Processor

2.8 GHz base frequency, 3 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1066 MT/s data rate

Intel® Celeron® Processors

Intel® Celeron® G550 Processor

2.6 GHz base frequency, 2 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1066 MT/s data rate

Intel® Celeron® G540 Processor

2.5 GHz base frequency, 2 MB cache, 2 cores, 2 threads

Intel HD Graphics

Supports DDR3 memory up to 1066 MT/s data rate

Intel® Celeron® G460 Processor

1.70 GHz base frequency, 1.5 MB cache, 1 core, 1 thread

Intel HD Graphics

Supports DDR3 memory up to 1066 MT/s data rate

GRAPHICS

Integrated on all models (depends on processor)

Intel HD Graphics: Basic, 2000, 2500, 4000

Optional Discrete Graphics Solutions

AMD Radeon HD 6350 (512 MB) PCIe x16
(includes a DMS-59 to Dual VGA Y Cable)

AMD Radeon HD7450 (1 GB) PCIe x16
(includes a DVI to VGA adapter cable)

NVIDIA NVS 300 (512 MB) PCIe x16
(Includes a DMS-59 to Dual VGA Y Cable)

NVIDIA NVS 310 (512 MB) PCIe x16

Adapters and Cables

DisplayPort to DisplayPort Cable

DisplayPort to DVI-D Adapter

DisplayPort to HDMI Adapter

DisplayPort to VGA Adapter

Standard Features and Configurable Components (availability may vary by country)

STORAGE

SATA Hard Drive

250 GB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5"

500 GB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5"

1 TB, 7200 rpm, SATA 6.0 Gb/s, SMART IV, 3.5"

SATA Self-encrypting Drive

320 GB, 7200 rpm, SATA, 3.5"

SATA Self-encrypting Solid State Drive

256 GB, SATA, 3.5"

SATA Solid State Drive

120 GB, SATA (with 3.5" adapter)

128 GB, SATA (with 3.5" adapter)

Optical Disc Drive

DVD-ROM

SuperMulti DVD Writer

Blu-ray Writer

Media Card Reader

22-in-1

MEMORY

Type

DDR3 non-ECC; up to 1600 MT/s

Maximum

32 GB

of Slots

4

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Memory modules support data transfer rates up to 1600 MT/s; actual data rate is determined by the system's configured processor. See processor specifications for supported memory data rate.

NETWORKING/COMMUNICATIONS

Ethernet (RJ-45)

Intel 82579LM Gigabit Network Connection (standard)

Intel Pro Gigabit CT Desktop PCIe x1 Network Card (optional)

Wireless

802.11b/g/n PCIe x1 (optional)

Standard Features and Configurable Components (availability may vary by country)

AUDIO/MULTIMEDIA

High Definition Audio with Realtek ALC221 codec (all ports are stereo)

Microphone* and headphone front ports (3.5mm)

Line-out and Line-In rear Ports* (3.5mm)

Multi-streaming capable*

Internal Speaker (standard)

Thin USB power speakers

USB HD 720P Business Webcam

Business Headset

* The front microphone port is re-taskable as a Line-in, Microphone-in or Headphone-out port. Rear audio input ports are re-taskable as a Line-in or Microphone-in port. External speakers must be powered externally. Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks. This allows for different audio applications to use separate audio ports on the system. For example, the front jacks could be used with a headset for a communications application while the rear jacks are being used with external speakers and a multimedia application.

KEYBOARDS AND POINTING DEVICES

Keyboard

PS/2 Keyboard

USB Keyboard

USB Smart Card (CCID) Keyboard

USB and PS/2 Washable Keyboard

Wireless Keyboard and Mouse Combo

Mice

PS/2 Optical Mouse

USB Optical Mouse

USB Laser Mouse

USB and PS/2 Washable Mouse

HP BIOS

Key features of the HP BIOS include:

- Deployment and manageability –HP BIOS provides several technologies that help integrate the HP Compaq 6300 Pro Series PC into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.
- Stability – HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.
- Supports UEFI specification 2.1
- Thermal and power management – The HP BIOS provides and enables thermal and power management technologies so component temperatures are managed for high reliability and to assist in operating the HP Business Desktop computer in any enterprise environment.
- Acoustic performance – Industry leading acoustic emissions across the range of operating conditions.
- Serviceability – HP BIOS provides diagnostic and detailed service information.
- Upgrades and recovery – HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (DOSFlash), BIOS updates from within Windows (HPQFlash), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.
- HP BIOS uses PKI signing of the BIOS for trusted BIOS upgrades and recovery.

Standard Features and Configurable Components (availability may vary by country)

Additional HP BIOS Features

- Power-On password – Helps prevent an unauthorized user from powering on the system.
- Administrator password – Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.
- Advanced Configuration and Power Interface (ACPI) – Represents a significant innovation in power and configuration management, allowing operating systems and applications to manage power based on activity and usage. HP Compaq business PCs use ACPI to provide power conservation features.
- S5 Max Power Savings setting supports EU Lot6 requirement and allows the computer to power down below 1W in S5 (when turned off). When S5 Max Power Savings feature is enabled power to slots is turned off along with WOL functionality.

SECURITY

Trusted Platform Module (TPM) 1.2

Stringent security (via BIOS)¹

SATA port disablement (via BIOS)

Drive lock

Serial, parallel, USB enable/disable (via BIOS)

Optional USB Port Disable at factory (user configurable via BIOS)

Removable media write/boot control

Power-On password (via BIOS)

Setup password (via BIOS)

HP Solenoid Hood Lock / Sensor

Support for chassis padlocks and cable lock devices

¹This setting is defaulted to disable; but when enabled, the PW jumper will not clear the BIOS pre-boot authentication passwords.

POWER

	SFF	MT
Power Supply		
240 W, active PFC, 90% high efficiency	X	
240 W active PFC, standard efficiency	X	
320 W, active PFC, 90% high efficiency		X
320 W active PFC, standard efficiency		X

ENVIRONMENTAL

Energy Star® qualified models available

EPEAT® registered where applicable/supported. See www.epeat.net for registration status by country.

BFR/PVC free (chassis, all internal components and modules)

Standard Features and Configurable Components (availability may vary by country)

PORTS

I/O Ports – Standard

- 4 – USB 3.0 (rear)
- 4 – USB 2.0 (front)
- 2 – USB 2.0 (rear)
- 1 – Serial RS-232 compatible
- 2 – PS/2 (color-coded support for keyboard (purple) and mouse (green))
- 1 – VGA
- 1 – DisplayPort 1.1
- 1 – Microphone and Headphone (front)
- 1 – Audio-in and Audio-out (rear)
- 1 – RJ-45 (accesses the integrated network interface controller)

I/O Ports – Optional

- 1 – Serial RS-232 compatible
- 1 – Parallel
- 1 – eSATA

BAYS

	SFF	MT
3.5" external <i>(For Media Card Reader unless used for secondary data drive)</i>	1 each	1 each
5.25" external	1 each 8.19" depth	2 each 8.19" depth
3.5" internal HDD	1 each	2 each

SLOTS

	SFF	MT
PCI (5 volt)	1 each 2.5" low profile 6.6" length 25W max. power	1 each 4.2" full height 6.6" length 25W max. power
PCI Express x1 (2.0)	2 each 2.5" low profile 6.6" length 10W max. power	2 each 4.2" full height 6.6" length 10W max. power
PCI Express x16 (3.0 – Primary)	1 each 2.5" low profile 6.6" length 25W max. power	1 each 4.2" full height 6.6" length 75W max. power

FORM FACTORS AVAILABLE

- Small Form Factor
- Microtower

Standard Features and Configurable Components (availability may vary by country)

SERVICE AND SUPPORT

3 year standard on-site warranty and service¹: This limited warranty and service offering delivers parts, labor and on-site repair. Optional terms available up to 5 years. Response time is next business day² and includes free telephone support³ 24 x 7. Global coverage² ensures any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor.

OPERATING SYSTEMS

Preinstalled

Genuine Windows® 7 Ultimate (32-bit or 64-bit)
Genuine Windows® 7 Professional (32-bit or 64-bit)
Genuine Windows® 7 Home Premium (32-bit or 64-bit)
Genuine Windows® 7 Home Basic (32-bit)
FreeDOS

For all Preinstalled operating systems HP provides Microsoft WHQL certified (where applicable) drivers on www.hp.com at the time of product announcement.

Supported

Genuine Windows® 7 Enterprise (32-bit or 64-bit)

For all Supported operating systems HP performs testing of the OS, and makes available all HP value add software (OS dependent). Certified drivers are made available on www.hp.com within 30 days of product announcement.

Limited Support

Genuine Windows® XP Professional (32-bit)

For all Limited Support operating systems HP will make available on www.hp.com certified drivers for major subsystems, if not provided by the operating system, within 30 days of product announcement.

HP performs functional testing on representative configurations. Some newer technologies may not be supported.

HP value added software and 3rd party applications (i.e. DVD players) are not supported.

Certified

Novell SUSE Linux Enterprise Desktop 11
Red Hat Enterprise Linux 64

For all Certified operating systems HP will submit hardware to the operating system vendor for testing and certification. All drivers would be obtained from the operating system vendor, not supplied by HP. Certification will be posted by the operating system vendor.

Test & Document

Genuine Windows® Vista Enterprise (32-bit or 64-bit)
Genuine Windows® Vista Professional (32-bit or 64-bit)

For all Test & Document operating systems HP will perform functional testing of the operating system on the HP business PC platform. Any issues found will be documented in an Engineering Advisory and/or Service Advisory and posted to www.hp.com. HP will not develop or qualify any drivers or perform any integration testing.

The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- Intel Gigabit CT Desktop NIC
- Broadcom NetXtreme Gigabit Ethernet Plus
- HP 22-in-1 Media Card Reader
- HP ProtectTools
- HP Blu-ray Writer playback of commercial movies
- DisplayPort video interface
- HP 2nd serial port adapter
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR®

The following features are not supported by Red Hat Enterprise Linux 64:

- TPM v1.2 embedded Security Chip
- Intel Gigabit CT Desktop NIC
- HP Wireless 802.11b/g/n NIC
- HP 22-in-1 Media Card Reader
- HP Blu-ray Writer
- HP FireWire / IEEE 1394 PCI Card
- HP 2nd serial port Adapter
- HP USB Smart Card (CCID) Keyboard
- AMD Radeon HD 6350 Graphics
- Power Management features
- Systems configured with Linux do not qualify for ENERGY STAR®

INCLUDED SOFTWARE COMPONENTS AND APPLICATIONS

- Adobe Flash Player
- Ask Search (alternate search engine)
- HP Marketplace
- HP Wallpaper
- Microsoft Advantage Program, including the following:
 - Bing Bar Toolbar
 - Bing Search
 - Microsoft Internet Explorer Home Page
 - Microsoft Office Starter 2010
- Microsoft Security Essentials
- PDF Complete Corporate Edition
- WinZip Basic
- Yahoo Search (alternate search engine)

INCLUDED HP DOCUMENTATION (eDOCS)

- HP eHelp Documentation
- HP Hardware Reference Guide
- HP Quick Setup & Getting Started Guide
- HP Regulatory and Safety Information
- HP Safety and Comfort Guide
- HP Warranty Documentation

INCLUDED HP SUPPORT APPLICATIONS

- HP Help and Support
- HP Recovery Manager
- HP Support Assistant

OPTIONAL SOFTWARE APPLICATIONS

Multi-media Software Applications

- Corel WinDVD 8 BD
- Corel WinDVD 8 SD
- Roxio Creator Business 10 HD
- SRS Premium Sound

Collaboration and Online Storage Solutions

- Box.net Online Storage (10GB) - USA only
- Box.net Online Storage (unlimited) - USA only
- HP Virtual Rooms (up to 3 people per meeting)

Productivity Solutions

- HP Power Assistant
- HP ProtectTools Security Suite v7.0
- Microsoft Office Professional 2010
- Microsoft Office Home & Business Edition 2010
- Microsoft Office Personal 2010 (Japan only)
- Microsoft Windows Virtual PC - XP mode
- PDF Complete Office Edition

Technical Specifications - Graphics

Intel HD Graphics

VGA Controller	Integrated
DisplayPort	1.1a; integrated, multimode capable; supports HDCP and audio over DisplayPort
Bus Type	PCI Express x16
RAMDAC	Integrated, 350 MHz
Memory	Intel graphics do not have dedicated memory but utilizes some of the computer's system memory. The amount of memory used for graphics depends on the amount of system memory installed, BIOS settings, operating system, and system load. 32 MB is pre-allocated for graphics use at system boot time. Additional memory can be allocated at boot time by the BIOS for PAVP (Protected Audio Video Playback) support for playback of protected video content.

Additional memory is allocated for graphics as needed using Intel's Dynamic Video Memory Technology (DVMT), to provide an optimal balance between graphics and system memory use.

Maximum Graphics Memory	Microsoft Windows XP	Microsoft Windows 7
	Up to 1GB	Up to 1.7GB

Note: the actual amount of maximum graphics memory can be less than the amounts listed above depending upon your computer's configuration.

HW Video Decode AVC/VC1/MPEG2/JPEG/MJPEG/PAVP

Maximum Color Depth 32 bits/pixel

Graphics/Video API Support 3rd Generation Core processors:

- The Processor Graphics contains a refresh of the seventh generation graphics core enabling substantial gains in performance and lower power consumption. Up to 16 EU support.
- Next Generation Intel Clear Video Technology HD Support is a collection of video playback and enhancement features that improve the end user's viewing experience
 - Encode/transcode HD content
 - Playback of high definition content including Blu-ray Disc
 - Superior image quality with sharper, more colorful images
 - Playback of Blu-ray disc S3D content using HDMI (V.1.4 with 3D)
- DirectX Video Acceleration (DXVA) support for accelerating video processing
 - Full AVC/VC1/MPEG2 HW Decode
- Advanced Scheduler 2.0, 1.0, XPDM support
- Windows 7, Windows XP, OSX, Linux OS Support
- DirectX 11, DirectX 10.1, DirectX 10, DirectX 9 support
- OpenGL 3.3 support

2nd Generation Core processors:

- The Processor Graphics contains a refresh of the sixth generation graphics core enabling substantial gains in performance and lower power consumption.
- Next Generation Intel Clear Video Technology HD support is a collection of video playback and enhancement features that improve the end user's viewing experience.
 - Encode/transcode HD content
 - Playback of high definition content including Blu-ray Disc
 - Superior image quality with sharper, more colorful images
 - Playback of Blu-ray disc S3D content using HDMI (V.1.4 with 3D)
- DirectX Video Acceleration (DXVA) support for accelerating video processing
 - Full AVC/VC1/MPEG2 HW Decode
- Advanced Scheduler 2.0, 1.0, XPDM support
- Windows 7, XP, Windows Vista, OSX, Linux OS Support
- DirectX 10.1, DirectX 10, DirectX 9 support
- OpenGL 3.0 support

Technical Specifications - Graphics

Supported Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Analog	Digital
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

* Only supported when using a DisplayPort connection

Note: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Note: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections

AMD Radeon HD 6350 Graphics Card

Introduction

The AMD Radeon HD 6350 DH PCIe x16 Graphics Card provides a low profile, PCI Express x16 graphics add-in card solution based on the AMD Radeon™ HD 6350 GPU. This card supports dual display video output through its single DMS-59 connector using a DMS-50 adapter cable.

An ideal solution for desktop PC customers seeking stable 2D and advanced 3D graphics performance, the AMD Radeon HD 6350 DH PCIe x16 Graphics Card is an excellent choice for small business users engaging in Web conferencing or video or photo editing, while improving your everyday business PC experience with better graphics and excellent visual display quality.

NOTE: Graphics cards use part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.

Key Benefits

- 512 MB of DDR3 dedicated on-board graphics frame buffer memory removing the need to share PC system memory
- AMD Radeon™ HD 6350 GPU
- Conforms to full PCI Express 2.0A specification for low profile form factor (x16 lanes native PCI Express implementation)
- Includes a DMS-59 to Dual VGA Y Cable
- HDCP supported on DVI outputs (DVI Requires optional kit DL139A)
- DirectX 11 support in hardware for optimal performance in DX11 applications.
- AMD Avivo technology for improved image and video playback.
- OpenGL 4.0 support in hardware for optimal performance with OpenGL applications

NOTE: The AMD Radeon HD 6350 PCIe x16 Graphics Card does not support Dual-link DVI capable monitors.

	PCI Express x16 (generation 2.0)
Form Factor	Low Profile, half length, 2.3" x 6.6"
	Full height bracket utilized when configured to MT
Graphics Controller	AMD HD 6350 GPU



Technical Specifications - Graphics

Output Connector	Single DMS-59 connector Supports dual analog displays with included DMS-59 to dual VGA Y cable. Also supports dual digital displays with an optional DMS-59 to dual DVI cable.
Core Clock	650MHz
Memory Clock	800MHz
Memory Frame Buffer	512MB, DDR3, 64-bit wide
Bus Type	PCI Express x16, Generation 2.0
Max. Vertical Refresh	85Hz
Display Support	Integrated 400MHz RAMDAC
Display Max. Resolution	Digital 1900 x 1200 Analog 2048 x 1536
Max. Power Consumption	19.9W
Supported Graphics APIs	HDCP supported on DVI output using optional DMS-59 to dual DVI cable. DirectX 11 support in hardware. OpenGL 4.0 support in hardware.

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1600	N/A	N/A

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

AMD Radeon HD 7450 Graphics Card

Introduction

The AMD Radeon HD 7450 DP (1GB) PCIe x16 Graphics Card provides a low profile, PCI Express x16 graphics add-in card solution based on the AMD Radeon™ HD 7450 Graphics Processor*. This card supports dual displays with its DisplayPort and dual link (DL) DVI connectors.

An ideal solution for desktop PC customers seeking stable 2D and advanced 3D graphics performance, the AMD Radeon HD 7450 DP (1GB) PCIe x16 Graphics Card is an excellent choice for small business users engaging in Web conferencing or video or photo editing, while improving the everyday business PC experience with better graphics and excellent visual display quality.

The AMD Radeon HD 7450 DP (1GB) PCIe x16 Graphics Cards delivers PCI Express (PCIe) features including:

- Full 16 lane PCIe bus support with peak bandwidth support
- High resolution monitor support with the dual-link DVI port
- Multimode DisplayPort connector for current and future display technology support



Technical Specifications - Graphics

NOTE: Graphics cards use part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.

* Based on AMD Radeon™ HD 6000 series GPU technology

Key Benefits

- 1GB of DDR3 dedicated on-board graphics frame buffer memory removing the need to share PC system memory
- Featuring the AMD Radeon™ HD 7450 Graphics Processing Unit
- Conforms to full PCI Express 2.0A specification for low profile form factor (x16 lanes native PCI Express implementation)
- Provides dual-link (DL) DVI-I and DisplayPort output ports. A DVI-to-VGA adapter cable included
- DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits [NR078AA](#), [FH973AT](#), [BP937AA](#), [AS615AA](#).

For a DisplayPort to DisplayPort connection use the optional DisplayPort Cable Kit VN567AA

- Supports audio with video through the DisplayPort connector
- DisplayPort 1.2 support provided in a future driver update
- HDCP supported on DisplayPort and DVI output
- DirectX 11 support in hardware for optimal performance in DX11 applications.
- ATI Avivo technology for improved image and video playback.
- OpenGL 4.0 support in hardware for optimal performance with OpenGL applications
- Thermally controlled fan for quiet operation.
- BFR/PVC free construction

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.3" x 6.6" Full height bracket utilized when configured to MT
Graphics Controller	AMD HD 7450 GPU (based on AMD Radeon HD 6000 series technology)
Output Connector	Dual-link (DL) DVI-I and DisplayPort output ports
Core Clock	625MHz
Memory Clock	800MHz
Memory Frame Buffer	1GB, DDR3, 64-bit wide
Bus Type	PCI Express x16, Generation 2.0
Max. Vertical Refresh	85Hz
Display Support	Integrated 400MHz RAMDAC
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536
Max. Power Consumption	19.9W
Supported Graphics APIs	DirectX 11 support in hardware. OpenGL 4.0 support in hardware.

Display Resolutions and Refresh Rates

NOTE: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60



Technical Specifications - Graphics

1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	60*
2048 x 1536	75	60*
2560 x 1600	N/A	60**

* Only supported with a Display Port monitor connection

** Only supported when using a dual link DVI or DP monitor connection.

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA NVS 300 Graphics Card

Introduction

The NVIDIA NVS 300 PCIe Graphics Card is a low profile, dual-head graphics card delivering next-generation multi-display capabilities to professional business and commercial applications.

If you require a graphics card for use with desktops in a telesales-center environment, or frequently analyze spreadsheets requiring the flexibility of dual-monitor displays, the NVIDIA NVS 300 PCIe Graphics Card is the ideal solution for you. Easily installed with a setup wizard, this controller integrates seamlessly with the Microsoft Windows environment. nView - NVIDIA's multi-display software, enhances your productivity in single or multi-display environments by allowing you to take advantage of features like gridlines & Virtual Desktops (Virtual Desktops allows an end user to create up to 32 individual desktops)

The NVIDIA NVS 300 PCIe Graphics Card is also GPU computing ready. It is capable of enhancing system performance if used in conjunction with applications that support GPU computing through DirectCompute, CUDA, or OpenCL frameworks.

The NVIDIA NVS 300 PCIe Graphics Card includes 512MB of DDR3 graphics memory. A minimum system memory configuration of 1GB is needed to support this card.

NOTE: Graphics cards use part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.

Key Benefits

- View your work on two monitors with nView multi-display software and create up to 32 individual desktops (using 'Virtual Desktops' with nView)
- Compatible with all major financial, non-linear editing (NLE), and electronic design automation (EDA) applications
- Includes 512 MB of dedicated DDR3 graphics memory
- Deliver crystal-clear images via dual 400-MHz RAMDACs
- Supports the latest flat-panel displays, dual analog or digital displays
- Robust IT management tools for seamless installation, deployment and maintenance
- Passive heatsink for silent operation
- DirectX 10.1 support in hardware for optimal performance in DX10 applications
- OpenGL 3.3 support in hardware for optimal performance with OpenGL applications

Form Factor	PCI Express x16 (generation 2.0) Low Profile, half length, 2.586" x 5.7" (6.57 x 14.48 cm) Full height bracket utilized when configured to MT
Graphics Controller	Nvidia GT218 GPU
Memory Frame Buffer	512MB DDR3, 64-bit wide Single DMS-59 connector
Output Connectors	Supports dual analog displays with included DMS-59 to dual VGA Y cable. Support dual digital displays with an optional adapter (see complete listing of available optional adapters elsewhere in this QuickSpec).
RAMDAC	Dual 400MHz
Core Clock	520MHz
Memory Clock	790MHz



Technical Specifications - Graphics

Frame Buffer	512MB DDR2, 64-bit wide
Maximum Pixel Clock (analog)	400MHz
Overlay planes	One 16-bit video overlay plane
Video Acceleration	Directx 10.1; OpenGL 3.3; CUDA, DirectCompute Full screen, full frame video playback of HDTV, Blu-ray and DVD content
High-definition Video Processor (HDVP)	Inbuilt video decoder for multiple video formats including MPEG2, VC-1, WMV9, H.264, and MVC Capable of decoding dual Video Streams at HD (1080p) resolutions Hardware color-space conversion (YUV 4:2:2 and 4:2:0) High-Quality in-built Filtering/Scaling Stereo & HD Audio (LPCM 7.1) support for HDMI outputs (HDMI via optional DVI-HDMI dongles) with the DMS-59 to DisplayPort Adapter
Supported Graphics APIs	OpenGL 3.3 support in hardware DirectX 10.0 support in hardware

Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.

NVIDIA NVS 310 Graphics Card

Introduction

If you are seeking stable 2D and advanced 3D graphics performance from your HP Compaq Business Desktop, the NVIDIA GeForce 310 DP PCIe x16 Graphics Card is the perfect solution, providing a low profile, PCI Express x16 graphics add-in card.

The NVIDIA GeForce 310 DP PCIe x16 Graphics Card is an excellent choice for your small business, enabling you to engage in video conferencing or 3D image manipulation, while improving your everyday business PC experience with faster frame rates and excellent visual quality.

The NVIDIA GeForce 310 DP PCIe x16 Graphics Card delivers PCI Express (PCIe) features including:

- Full 16 lane support with peak bandwidth support
- High resolution LCD monitor support with the dual-link DVI port
- Multimode DisplayPort connector for current and future technology support

Key Benefits

- Stable 2D and advanced 3D graphics performance



Technical Specifications - Graphics

- Faster frame rates and excellent visual quality
- Low profile configured with full-height bracket
- 512 MB DDR3 dedicated on-board graphics frame buffer memory
- Conforms to full PCI Express 2.0 specification for low-profile form factor (x16 lanes native PCI Express implementation)
- Provides dual-link (DL) DVI-I and DisplayPort output ports
- Dual-link (DL) DVI support for high resolution LCD monitor support (such as the HP LP3065 LCD monitor)
- DisplayPort connector supports multimode technology to support connection to DVI-D, VGA and HDMI monitors with optional adapters in kits [NR078AA](#), [FH973AT](#), [BP937AA](#), [AS615AA](#).

For a DisplayPort to DisplayPort connection use the optional DisplayPort Cable Kit VN567AA.

- Supports audio with video through the DisplayPort connector
- HDCP for content protected playback support
- DisplayPort connector supports Multimode technology to support connection to DVI-D monitors*

*With the appropriate adapter cable

Bus Type	PCI Express x16
Graphics Chip	GT218
Core Clock	589MHz
Memory Clock	790MHz
Frame Buffer	512MH DDR2, 64-bit wide
Audio Support	Audio supported through DisplayPort only; integrated HD audio codec supports linear PCM and Dolby Digital (7.1) audio formats
Max. Power	25W
Dimensions	2.71" x 6.6" (68.90mm x 167.65mm)
Maximum Vertical Refresh Rate	85Hz
Display Support	Integrated 400MHz RAMDAC
Display Max. Resolution	Digital 2560 x 1600 Analog 2048 x 1536

Display Resolutions and Refresh Rates

Note: other resolutions may be available but are not recommended as they may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog	Digital
640 x 480	85	60
800 x 600	85	60
1024 x 768	85	60
1280 x 720	85	60
1280 x 1024	85	60
1440 x 900	75	60
1600 x 1200	85	60
1680 x 1050	75	60
1920 x 1080	85	60-R
1920 x 1200	85	60-R
1920 x 1440	85	N/A
2048 x 1536	75	N/A
2560 x 1600	N/A	60*

* Only supported when using a dual-link DVI or DP connection

Note: 60-R denotes reduced blanking timings are used on single link DVI connections and may be used with other digital connections.



Technical Specifications - Graphics

Board Display Options Supports two displays via dual DisplayPort connectors

Technical Specifications – Hard Disk and Solid State Storage

Introduction:

HP Serial Advanced Technology Attachment (SATA) Hard Drives maximize the performance of HP Business PCs by providing the technologies to meet your increasing storage demands with high-capacity drives offering superior reliability and performance.

SATA provides faster data transfer speeds, better system cooling airflow, more bandwidth, more headroom for speed increases in future generations and better data integrity. A next-generation technology, the SATA interface connects hard drives to the PC platform enabling easy aggregation of multiple hard drives into a single PC. This offers you the additional benefits of dedicated bandwidth, the ability to more easily identify device failures and scalability. The HP Compaq 6300 Pro Series supports the latest SATA 6.0Gb/s specification.

HP Drive Lock

HP Serial ATA Hard Drives offer enhanced security via a new Drive Lock. When enabled, this ATA security feature set prevents software access to user data on the drive until one or two user-defined passwords are provided.

SMART IV Technology

Self Monitoring Analysis and Reporting Technology (SMART) hard drive technology allows hard drives to monitor their own health and to raise flags if imminent failures are predicted. If the drive determines that a failure is imminent, the SMART hard drive technology enables the intelligent manageability or management software to generate a fault alert. While the current versions of SMART hard drives do a good job monitoring the data on the hard drive media, the ever increasing emphasis on reliability and quality has promoted HP to implement SMART IV technology which constantly checks that the data flow from host interface to media and media to host interface is not compromised. This is accomplished by inserting a 2 byte parity code into every 512 byte block in the data path of the hard drive's Cache RAM. This unique parity checking performed by HP's SMART IV technology hard drives, allows for more complete error detection coverage encompassing the entire data path between the host and the hard drive.

Smart IV is also known as IOEDC: I/O Error Detection Code.

Native Command Queuing

NCQ or Native Command Queuing is a SATA protocol extension that allows the hard drive to have several write or read commands outstanding at the same time. In contrast, normal non-queued operation requires each command to be completed before the next command is issued by the host system. Queuing allows the drive to complete the commands in the order that allows for best overall throughput. It also involves an advanced method of transferring data to or from the host, called First Party Direct Memory Access (FPDMA), which allows the hard drive and the host controller to manage the data transfers for multiple outstanding commands, without involving the host processor. NCQ can contribute to better performance but the results are dependent on many factors, including the access patterns of the various applications and operating system functions that are initiating drive accesses. Enabling NCQ features in the hard drive requires AHCI support from the host system BIOS, controller, and driver. AHCI support is typically implemented in RAID configurations.

Note: GB = 1 billion bytes. Actual available capacity is less.

Technical Specifications – Hard Disk and Solid State Storage



Storage Drive Support						
	SFF			MT		
	MCR	ODD	HDD	MCR	ODD	HDD
# of supported devices	1	1	2	1	2	2
Drive position	1	2	1,3	3	1,2	4,5

Controller

Hard Drive Controller

These systems provide four serial ATA (SATA) interfaces that support transfer rates up to 6.0 Gb/s (for ports 0 and 1, 3 Gb/s on all others). These systems can also support an external SATA (eSATA) device through an optional bracket/cable assembly.

SATA Interfaces

2 ea. SATA 3.0
1 ea. SATA 2.0
1 ea. eSATA

Host SATA Controller

Advanced Host Controller Interface (AHCI) Revision 1.2. The specification includes a description of the hardware/software interface between system software and the host controller hardware.

HP 250-GB 7200rpm SATA 6.0Gb/s 3.5" Hard Disk Drive

Capacity	250,059,350,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	8 MB
Logical Blocks	488,397,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 1.0 ms
	Average: 8.5 ms
	Full-Stroke: 18 ms
Height (nominal)	1 in (2.54 cm)
Width (nominal)	Media diameter: 3.5 in (8.89 cm)
	Physical size: 4 in (10.2 cm)
Operating Temperature	41° to 131° F (5° to 55° C)

Technical Specifications – Hard Disk and Solid State Storage

HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Capacity	500,107,862,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	16 MB
Logical Blocks	976,773,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5” Hard Disk Drive

Capacity	1,000,204,886,016 bytes
Rotational Speed	7,200 rpm
Interface	Serial ATA 3.0 (6.0 Gb/s)
Buffer Size	32 MB
Logical Blocks	1,953,525,168
Seek Time (typical reads, includes controller overhead, including settling)	Single Track: 2.0 ms Average: 11 ms Full-Stroke: 21 ms
Height (nominal)	1 in/2.54 cm
Width (nominal)	Media diameter: 3.5 in/8.89 cm Physical size: 4 in/10.2 cm
Operating Temperature	41° to 131° F (5° to 55° C)

HP 120-GB Solid State Drive

Unformatted Capacity	120 GB
Architecture	Multi Level Cell (MLC) NAND Flash with wear leveling 10 channel controller
Interface	Serial ATA 2.0 (3.0 Gb/s)
Dimensions (W x H x D)	2.74 x 0.37 x 4 in/6.98 x 0.95 x 10.2 cm
Weight	0.18 lb/80 g
Bandwidth Performance	Sustained Sequential Read: Up to 250 MB/s Sustained Sequential Write: Up to 70 MB/s Random Read: Up to 35K IOPs Random Write: Up to 6.6K IOPs
Latency	Read: 65-ms Write: 85-ms
Power	DC power requirement: 5 VDC 5%-100 mV ripple p-p Total power consumption: 0.15W (active); 0.075W (idle)
Useful Drive Life	35TB written, up to 20GB/day for 5 years

Technical Specifications – Hard Disk and Solid State Storage

Environmental (all conditions, non-condensing)	Operating Temperature: 32° to 158° F (0° to 70° C)
	Relative Humidity: 5% to 95%
	Maximum Wet Bulb Temperature (operating): 84° F (29° C)
	Shock: 1,500 G/0.5-ms

HP 128 GB Solid State Drive

Unformatted Capacity	128 GB*
Architecture	Multi Level Cell (MLC) NAND
Interface	SATA 6 GB/sec
Dimensions (W x H x D)	2.75 x 0.276 x 3.96 in (6.985 x 0.7 x 10.05 cm)
Weight	0.16 lb (73 g)
Bandwidth Performance	Sustained Sequential Read: Up to 450 MB/s
	Sustained Sequential Write: Up to 260 MB/s
	Random Read: up to 46K IOPs
	Random Write: up to 56K IOPs
Latency	Read: 55µs (TYP)
	Write: 55µs (TYP)
Power	DC power requirement: Min 4.5 V; Max 5.5 V
	Total power consumption: 160 mW (Active) ; <85 mW; (Idle)
Useful Drive Life	1.2 million device hours**
Environmental (all conditions, non-condensing)	Operating Temperature: 32° to 158° F (0° to 70° C)
	Relative Humidity: 5% to 95%
	Maximum Wet Bulb Temperature (operating): 84° F (29° C)
	Shock: 1,500 G/1.0 msec
Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, Korea KCC, CE Mark
Option kit contents	HP 128 GB Solid State Drive, documentation, 3.5-inch bay adapter bracket, 3.5-inch bay adapter bracket screws, SATA cable

* For solid state disk drives, GB means 1 billion bytes. 128GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity will vary by content

** The product achieves a mean time between failure (MTBF) based on population statistics not relevant to individual units.

Technical Specifications - Removable Storage

HP Blu-ray Writer Drive

AMO Part Number	AR482AA	
Height	5.25-inch, half-height, tray-load	
Orientation	Either horizontal or vertical	
Interface type	SATA	
Disc capacity	50 GB DL or 25 GB standard	
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 19.0 cm)	
Weight (max)	2.0 lb (907 g)	
	DVD-ROM	8.5GB DL or 4.7GB standard
	Blu-ray	50GB DL or 25GB standard
	Full Stroke DVD	< 250 ms (seek)
	Full Stroke CD	< 210 ms (seek)
	Blu-ray	< 275 ms (seek)
		(Time to drive ready from tray loading)
	BD-ROM (SL/DL)	25S / 28S
	BD-R (SL/DL)	25S / 28S
	BD-RE (SL/DL)	25S / 28S
	DVD-ROM (SL/DL)	18S / 18S
Disc Capacity	DVD-R (SL/DL)	25S / 25S
	DVD-RW	25S
	DVD+R (SL/DL)	25S / 25S
	DVD+RW	DVD+RW 25S
	DVD-RAM	45S
	CD-ROM	15S
	CD-ROM Read	CD-ROM up to 40X
		CD-R up to 40X
		CD-RW up to 40X
	DVD-ROM Read	DVD-RAM up to 5X
		DVD+RW up to 10X
		DVD-RW up to 10X
		DVD+R DL up to 8X
		DVD-R DL up to 8X
Maximum Data Transfer		DVD-ROM up to 16X

Technical Specifications - Removable Storage

Rates		DVD-ROM DL up to 8X
		DVD+R up to 12X
		DVD-R up to 12X
	Blu-ray	BD-ROM up to 6X
		BD-ROM DL up to 4.8X
		BD-R up to 6X
		BD-R DL up to 4.8X
		BD-R up to 6X
		BD-RE SL/DL up to 4.8X
	Power	Source
DC Power Requirement		5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
DC Current		5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum
Temperature (operating)		41° to 122° F (5° to 50° C)
Environmental (all conditions non-condensing)	Relative Humidity (operating)	10% to 90%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)

HP SuperMulti DVD Writer Drive

AMO Part Number	AR630AT		
Height	5.25-inch, half-height, tray-load		
Orientation	Either horizontal or vertical		
Interface type	Serial ATA		
Dimensions (W x H x D)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
Weight (max)	2.6 lb (1.2 kg)		
	CD Media Read Access	Random	< 120 ms typical
		Full Stroke	< 200 ms typical
	DVD Media Read Access	Random	< 130 ms typical
		Full Stroke	< 240 ms typical
		CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
	CD Media Read Transfer	Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
		Video CD Playback	Up to 2400 KB/s (16X)
		DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)

Technical Specifications - Removable Storage

		DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
		DVD-R	Up to 21600 KB/s (16X)
Performance		DVD+R	Up to 21600 KB/s (16X)
		DVD-RW	Up to 10800 KB/s (8X)
		DVD-R DL	Up to 10800 KB/s (8X)
		DVD+RW	Up to 10800 KB/s (8X)
		CD-R Write	Up to 6000 KB/s (40X)
		CD-RW	600 KB/s (4X)
	CD Media Write Transfer	CD-RW (High speed)	1500 KB/s (10X)
		CD-RW (Ultra speed)	Up to 3600 KB/s (24X)
		CD-RW (Ultra speed+)	Up to 4800 KB/s (32X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD+R DL (v1.2)	Up to 16200 KB/s (12X)
		DVD+R DL (v1.1)	Up to 10800 KB/s (8X)
		DVD+RW (Volume 2 v1.0)	Up to 10800 KB/s (8X)
		DVD+RW (Volume 1 v1.3)	Up to 5400 KB/s (4X)
		DVD-R (v2.1 rev. 6.0)	Up to 16200 KB/s (12X)
	DVD Media Write Transfer	DVD-R (v2.1 rev. 4.0)	Up to 21600 KB/s (16X)
		DVD-R DL (v3.0 rev. 5.0)	Up to 10800 KB/s (8X)
		DVD-R DL (v3.0 rev. 3.0)	Up to 10800 KB/s (8X)
		DVD-RW (v1.2 rev. 3.0)	8100 KB/s (6X)
		DVD-RW (v1.2 rev. 2.0)	Up to 5400 KB/s (4X)
		DVD-RAM (v2.2 rev. 5.0)	Up to 16200 KB/s (12X)
		DVD-RAM (v2.2 rev. 2.0)	Up to 6750 KB/s (5X)
	Media	Read	Write
	CD-ROM	Yes	No
	CD-R	Yes	No
	CD-RW	Yes	No
	DVD-ROM	Yes	No
	DVD-ROM DL	Yes	No
Media Compatibility	DVD-RAM	Yes	No
	DVD+R	Yes	No
	DVD+R DL	Yes	No
	DVD+RW	Yes	No
	DVD-R	Yes	No
	DVD-RW	Yes	No
	DVD-R DL	Yes	No
	Source	SATA DC power receptacle	
	DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p
		12 VDC ± 5%	200 mV ripple p-p
		5 VDC	<1000 mA (typical)
Power Supply			1600 mA (max.)

Technical Specifications - Removable Storage

	DC Current	12 VDC	1200 mA (typical) 2000 mA (max.)
		Total Drive Power (Standby Mode)	< 2.5W
Rear Panel	SATA Power Connector, 15-pin SATA Data Connector, 7-pin Markings to identify each connector		
	Operating Temperature	41° to 122° F (5° to 50° C)	
	Storage Temperature	-22° F to 140° F (-30° C to 60° C)	
Environmental conditions (all conditions non-condensing)	Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)	

HP DVD-ROM Drive

AMO Part Number	AR629AA
Height	5.25-inch, half-height, tray-load
Orientation	Either horizontal or vertical
Interface type	Serial ATA
Dimensions (W x H x D)	5.8 x 1.7 x 6.9 in (14.8 x 4.2 x 17.5 cm)
Weight (max)	2.1 lb (950 kg)

	CD Media Read Access	Random	< 120 ms typical
		Full Stroke	< 200 ms typical
	DVD Media Read Access	Random	< 130 ms typical
		Full Stroke	< 240 ms typical
		CD-ROM, CD-R Read	Up to 6000 KB/s (40X)
		CD-RW Read	Up to 4800 KB/s (32X)
		Digital/Analog Audio Playback	Up to 2400 KB/s (16X)
	CD Media Read Transfer	Digital Audio Extraction (CD-ROM, CD-R)	Up to 6000 KB/s (40X)
		Digital Audio Extraction (CD-RW)	Up to 4800 KB/s (32X)
Performance		Video CD Playback	Up to 2400 KB/s (16X)
		DVD-ROM SL Read	Up to 21600 KB/s (16X)
		DVD-ROM DL Read	Up to 10800 KB/s (8X)
		DVD Video Playback	Up to 10800 KB/s (8X)
		DVD Video SL (other than playback)	Up to 21600 KB/s (16X)
	DVD Media Read Transfer	DVD Video DL (other than playback)	Up to 10800 KB/s (8X)
		DVD-R	Up to 21600 KB/s (16X)
		DVD+R	Up to 21600 KB/s (16X)
		DVD-RW	Up to 10800 KB/s (8X)
		DVD-R DL	Up to 10800 KB/s (8X)
		DVD+RW	Up to 10800 KB/s (8X)
		Media	Read
		Write	
	CD-ROM	Yes	No



Technical Specifications - Removable Storage

Media Compatibility	CD-R	Yes	No	
	CD-RW	Yes	No	
	DVD-ROM	Yes	No	
	DVD-ROM DL	Yes	No	
	DVD-RAM	Yes	No	
	DVD+R	Yes	No	
	DVD+R DL	Yes	No	
	DVD+RW	Yes	No	
	DVD-R	Yes	No	
	DVD-RW	Yes	No	
Power Supply	Source	SATA DC power receptacle		
	DC Power Requirement	5 VDC ± 5%	100 mV ripple p-p	
		12 VDC ± 5%	200 mV ripple p-p	
	DC Current	5 VDC	1000 mA (typical)	1600 mA (max.)
		12 VDC	1200 mA (typical)	2000 mA (max.)
Total Drive Power (Standby Mode)		< 2.5W		
Rear Panel	SATA Power Connector, 15-pin			
	SATA Data Connector, 7-pin			
Environmental conditions (all conditions non-condensing)	Markings to identify each connector			
	Operating Temperature	41° to 122° F (5° to 50° C)		
	Storage Temperature	-22° F to 140° F (-30° C to 60° C)		
	Relative Humidity	10% to 90%		
	Maximum Wet Bulb Temperature	86° F (30° C)		
	Altitude	0 to 10,171 ft. (0 to 3,100 meters)		

HP 22-n-1 Media Card Reader

USB 2.0 High-speed interface

USB Interface

Note:

Requires the USB cable to be connected to the internal USB 2.0 port or a USB 2.0 PCI card.

Supports hardware ECC (Error Correction Code) function

Supports hardware CRC (Cyclic Redundancy Check) function

Supports MS 4-bit parallel transfer mode

Supports MS-PRO 4-bit parallel transfer mode

Advance protocol support

Supports MS PRO-HG Duo 4-bit parallel transfer mode

Supports SD 4-bit parallel transfer mode

Supports high-speed 50Mhz SD 4-bit card (version 2.0)

Supports high-speed 52Mhz MMC 8-bit card (version 4.2)

Supports CF v4.0 with PIO mode 6 and Ultra DMA mode



Technical Specifications - Removable Storage

	CompactFlash Type I	
	CompactFlash Type II	
	Microdrive	
	MultiMediaCard (MMC)	
	Reduced Size MultiMediaCard (RS MMC)	
	MultiMediaCard 4.2 (MMC Plus, including MMC Plus HC)	
	Reduced Size MultiMediaCard 4.2 (MMC Mobile, including MMC Mobile HC)	
	Secure Digital Card (SD)	
	Secure Digital High Capacity (SDHC)	
	miniSD	
Supported media type	miniSD High Capacity	
	Micro SD (T-Flash)	
	Micro SD HC	
	Memory Stick	
	Memory Stick Select	
	Memory Stick Duo (MS Duo)	
	Memory Stick PRO (MS PRO)	
	Memory Stick PRO Duo (MS PRO Duo)	
	Memory Stick PRO-HG Duo	
	MagicGate Memory Stick (MG)	
	MagicGate Memory Stick Duo	
	xD-Picture Card	
Supported media type with card adapter	Memory Stick Micro (M2)	
	MMC Micro	
		Test Parameters/Conditions - Power applied, unit operating on system $\pm 5\%$ nominal supply voltage.
		10°C 10% R.H. \leq 24 hours
		10°C 90% R.H. \leq 24 hours
		20°C 90% R.H. \leq 24 hours
		30°C 90% R.H. \leq 24 hours
		40°C 90% R.H. \leq 24 hours
		50°C 90% R.H. \leq 24 hours
		50°C 10% R.H. \leq 24 hours
Environmental		
		Test Parameters/Conditions
		140°F (60°C) @ 80% R.H. for 96 hours
		-22°F (-30°C) @ 20% R.H. for 48 hours
		No power applied
		Delta °C < 1.0°C/min
		Delta % R.H. < 1.5% R.H./min
	Operational Environmental Extremes	
	Storage Environmental Extremes	

Technical Specifications - Removable Storage

Approvals

USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0

Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3

FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUV-T

Technical Specifications – Memory

System Memory Support

The HP Compaq Pro 6300 Business PC supports the 2nd and 3rd generation Intel® Core™ processor families. Based on a new PC micro-architecture, the processor is designed for a two-chip platform consisting of a processor and Platform Controller Hub (PCH). Unlike previous generations, the processor includes an integrated memory controller (IMC). The IMC supports DDR3 protocols with two independent, 64-bit wide channels each accessing one or two DIMMs.

- Two channels of non-ECC DDR3 unbuffered dual in-line memory modules (UDIMM) or DDR3 unbuffered small outline dual in-line memory modules (SO-DIMM) with a maximum of two DIMMs per channel
- Single-channel and dual-channel memory organization modes
- Data burst length of eight for all memory organization modes
- DDR3 memory data transfer rates of up to 1600 MT/s; actual supported DDR3 data transfer rate determined by the configured processor.
- 64-bit wide channels
- DDR3 system memory I/O voltage of 1.5V
- Theoretical Maximum Memory Bandwidth:
 - 10.6 GB/s in single-channel mode of 21.3 GB/s in dual-channel mode assuming DDR3 1333 MT/s
 - 12.8 GB/s in single-channel mode or 25.6 GB/s in dual-channel mode assuming DDR3 1600 MT/s
 - 32 GB maximum memory support depending upon available number of DIMM sockets

CAUTION: You must shut down the computer and disconnect the power cord before adding or removing memory modules. Regardless of the power-on state, voltage is always supplied to the memory modules as long as the computer is plugged in to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board.

Memory Configurations:

Slot 1 is black and must always be populated. Not all memory configurations possible are represented below.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements. Addressing memory above 4 GB requires a 64-bit operating system.

Total Memory	Socket			
	Channel A		Channel B	
	1 (black)	2 (white)	3 (white)	4 (white)
2 GB	2 GB	unpopulated	Unpopulated	unpopulated
4 GB (dual channel)	2 GB	unpopulated	2 GB	unpopulated
8 GB (dual channel)	2 GB	2 GB	2 GB	2 GB
16 GB (dual channel)	8 GB	4 GB	4 GB	4 GB

Technical Specifications - Communications

Intel 82579LM GbE Network Connection (integrated)

Connector	RJ-45
System Interface	Integrated on PCA
Controller	Intel 82579LM GbE platform LAN connect networking controller
Memory	24 KB FIFO packet buffer memory
Data rates supported	10/100/1000 Mbps
	802.1P
	802.1Q
	802.2
IEEE Compliance	802.3
	802.3ab
	802.3az
	802.3u
Bus architecture	PCI Express and SMBus
Data transfer mode	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
Power requirement	Requires 3.3V and 1.05V or just 3.3V with integrated regulators Power consumption 0.697 Watts
Boot ROM support	Yes
Network transfer mode	Full-duplex
	Half-duplex (not supported for the 1000BASE-T transceiver)
Network transfer rate	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps
Environmental	Operating Temperature: 0° to 85° C
	Operating Humidity: 60% RH
Management	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic.
Alerting	ASF 2.0 support; AMT 7.0 support

Intel Gigabit CT Desktop Network Interface Controller

Connector	RJ-45
System Interface	PCI Express x1
Controller	Intel WG82574L Gigabit Ethernet Controller
Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
Data rates supported	10/100/1000 Mbps
Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
Bus architecture	PCI-E 1.0a
Data path width	X1, 250 MB/s, Bi-directional interface
Data transfer mode	Bus-master DMA
Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
Power requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
Boot ROM support	Yes

Technical Specifications - Communications

	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
Network Transfer Rate	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating Temperature: 32° to 131°F (0° to 55° C)
	Operating Humidity: 85% at 131° F (55° C)
Dimensions	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)
Management	WOL, PXE, DMI, WFM 2.0

HP 802.11 b/g/n Wireless Network Connection

Dimensions (L x H)	2.8 x 2.2 in (7.0 x 5.7 cm)
Weight	0.08 lbs (40 g)
Controller	Ralink RT2790
System interface	PCI Express x1
Network standard	802.11 b/g/n
Frequency band	2.400 - 2.497 GHz
Operating temperature	14° to 149°F, operating (-10° to 65°C, operating)
Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)
Humidity	10-90% operating 5-95% non-operating
Operating voltage	3.3V +/- 9% 12V +/- 8%

	Platform/WLAN Mode	Power Consumption
	Maximum Power Consumption:	10 Watts
	Transmit Only	4 Watts maximum averaged power over 1 second
	Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer
Power Consumption	Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second
	Idle, with IEEE PSP mode enabled	1.0 Watts maximum averaged over 1 second
	Transmit Disabled (turned off in software)	50 mW maximum, averaged over 1 second
	Platform in S3 or S4 (power removed from Low Profile PCI Express Card)	5 mW maximum, averaged over 1 second
	802.11b mode	+19 dBm +/- 1.0 dB maximum
Output Power (approximate)	802.11g mode	+17 dBm +/- 1.0 dB maximum
	EWC mode	+17 dBm +/- 1.0 dB maximum (total power in all transmit chains)

Technical Specifications - Communications

Security	IEEE and WiFi compliant 64 / 128 bit WEP encryption AES: CCM 802.1x authentication WPA: 802.1x. WPA-PSK and TKIP WPA2 certification IEEE 802.11i
Antenna	Cisco Certified Extensions, all versions through V5 HP part number 497317-003
Certifications	Wi-Fi certified
Certifications for use by country	United States, Canada, Peru, Taiwan

Technical Specifications - Audio

High Definition Audio

Type	Integrated
HD Stereo Codec	Realtek 2-channel ALC221 codec
Audio I/O Ports	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load) Front Microphone/Headphone jack is re-task able to provide Microphone input, line-in or Headphone output to support connecting two headphones to the front of the system. When configured as a second front headphone output, both front headphone outputs are always driven with the same signal. All ports are 3.5mm
Internal Speaker Amplifier	1.5W amplifier for the internal speaker only. External speakers must be powered externally. Rear Line-in audio port is re-taskable as either Line-in or Microphone-In.
Multi-streaming Capable	Multi-streaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
Sampling	8 kHz - 192 kHz
Wavetable Syntheses	Yes – Uses OS soft wavetable
Analog Audio	Yes
# of Channels on Line-Out	Stereo (Left & Right channels)
Internal Speaker	Yes
External Speaker Jack	Yes

HP Thin USB Powered Speakers

On/Off/Volume Controls	Right side of right speaker
Power LED	Front of right speaker (green)
Frequency Response	FO to 20kHz
Watts	2/3 watt (normal/maximum)
Dimensions/Speaker (H x W x D)	5.72 x 3.74 x 0.96 in 14.52 x 9.50 x 2.45 cm
Net Weight	0.68 lbs 0.31kg
Color	Black
Environmental (all conditions non-condensing)	Operating Temperature: 14° to 104° F (-10° to 40° C) Relative Humidity 40% to 90%
Speaker Cable Length	Input Cord: 5.91 ft (1800 mm) L-channel Cord: 3.28 ft (1000 mm) USB Cord: 5.91 ft (1800 mm)

Technical Specifications - Input/Output Devices

HP USB Standard Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical characteristics	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg)
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
Electrical	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
Mechanical	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
Environmental	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
Kit contents	Keyboard	Installation Guide
	Warranty Card	Safety and Comfort Guide

Technical Specifications - Input/Output Devices

HP PS/2 Standard Keyboard

	Keys	104, 105, 106, 107, 109 layout (depending upon country)
Physical Characteristics	Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
Electrical	System interface	PS/2 6-pin mini din connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
Mechanical	Languages	38 available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft 1.8 m
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
Environmental	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

HP USB Smart Card (CCID) Keyboard

Introduction:



Technical Specifications - Input/Output Devices

Boost your security, simplify access procedures and reduce the costs associated with managing networks by preventing unauthorized access to your computers and networks using smartcard technology with the HP Smart Card (CCID) Keyboard.

The USB Smart Card (CCID) Keyboard is a full-sized keyboard that takes advantage of digital signatures and certificates to secure the environment for transactions performed on both public and private networks. The USB Smart Card (CCID) Keyboard works with all smart cards that comply with ISO standard 7816.

Smart cards are easy-to-use credit card-sized devices which require multiple forms of information to be validated before you gain access to your accounts or resources. Used worldwide, smart cards strengthen access to a network or other resource using dual-factor authentication. Implementing a two-factor authentication (or multi-factor authentication) process reduces the risk of unauthorized access by verifying and validating your identity in one of the following ways:

- Something you know – a combination of username and password or PIN
- Something you have – a smart card or security token.

Something you have (smart card) plus something you know (PIN), improves user-access security within corporate network environments. Smart cards are used in government agencies, healthcare companies and the finance industry.

HP ProtectTools Smart Card Manager provides authentication software for the smart card. The Smart Card Reader module works with the HP ProtectTools Security Manager and enables the user to setup, use, and manage the smart card. This allows strengthened security with HP patented technology.

- Protects against unauthorized access with smart card technology
- Delivers even greater security when combined with a HP ProtectTools smart card and the HP ProtectTools Security Software
- Combination of username and password or pin with a smart card or security token
- Secures online transactions using digital signatures and certificates
- Conforms to industry standards for ease of setup and use
- Delivers long product life and quiet operation with high-impact materials and lubricated keys
- Spill drain feature

Key Benefits:

Physical Characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
	Form factor	USB basic smart card keyboard
	Colors	Carbonite/Silver
	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in 46.3 x 16.1 x 3.3 cm
Electrical	Weight	2 lb (0.9 kg) minimum
	Operating voltage	+ 5VDC ± 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Standard design
	Switch actuation	55 g nominal peak force with tactile feedback
Mechanical	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)

Technical Specifications - Input/Output Devices

	Microsoft PC 99 - 2001	Mechanically compliant	
	Acoustics	43-dBA maximum sound pressure level	
	Operating temperature	50° to 122° F (10° to 50° C)	
	Non-operating temperature	-22° to 140° F (-30° to 60° C)	
	Operating humidity	10% to 90% (non-condensing at ambient)	
	Non-operating humidity	20% to 80% (non-condensing at ambient)	
	Operating shock	40 g, six surfaces	
	Non-operating shock	80 g, six surfaces	
	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Support	All ISO 7816 smart cards	
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
	Chipset	SCM STCIII	
	Standard APIs supported	PC/SC, EMV2000, CT-API	
	Power	USB Port	
		Short circuit detection (protects smart card and reader)	
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
		Supports 3-V and 5-V cards	
SmartCard Function	Power consumption	100-mA maximum draw	
	Communication	From card	9600 bps to 330,000 bps
		From computer	12 Mbps (USB transfer speed)
	Landing mechanism	Contact device	Friction contact
		Card insertions rating	Up to 100,000 insertion cycles
	Interface modes	CCID protocol	
	Reader performance interface	USB connection	
	Electro-magnetic standards	Europe	2004/108/EC
		USA	USAFCC part 15
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, EMV2000, USB-IF		
Ergonomic Compliance	ISO 9241-4, TUVGS		
Kit Contents	Keyboard, I/O Security and Documentation CD, warranty card		

Technical Specifications - Input/Output Devices

HP USB PS/2 Washable Keyboard

	Keys	104 (US) layout or 105 (EU) layout (depending upon country)
Physical Characteristics	Dimensions (L x W x H)	17.67x 6.62 x 1.38 in (449 x 168 x 35 mm)
	Weight	1.7 lb (0.77 kg) minimum
	Operating voltage	+ 5VDC \pm 5%
	Power consumption	50-mA maximum (with three LEDs ON)
Electrical	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft® PC 99 - 2001	Functionally compliant
Mechanical	Keycaps	Stepped -profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	7 ft (2.2 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
	Operating temperature	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
Environmental	Operating humidity	10% to 95% (non-condensing at ambient)
	Non-operating humidity	0% to 95% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
Operating system support	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
Operating system support	Windows® 7, Windows Vista, Windows XP Professional	
	Approvals	UL, cUL, FCC, CE, TUV GS, VCCI, BSMI, C-Tick, KCC, USB-IF, WHQL, EN/IEC 60601-1, IP66/NEMA4X
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	

Technical Specifications - Input/Output Devices

HP Wireless Keyboard and Mouse

Keyboard	Dimensions (H x L x W)	1.47 x 18.06 x 6.43 in (37.3 x 458.8 x 163.2 mm)
	Weight – Without Two AA Alkaline Batteries	1.96 lb (890 g)
Mouse	Dimensions (H x L x W)	1.51 x 4.69 x 2.71 in (38.4 x 119 x 68.9 mm)
	Weight – Without Two AA Alkaline Batteries	0.17 lb (80 g)
Receiver	Dimensions (H x L x W)	0.31 x 0.72 x 2.24 in (8 x 18.4 x 57 mm)
	Weight	0.27 oz (7.6 g)
	Cable Length – Minimum	6 ft (1.8 m)
	Range	32.8 ft (10 m)

Windows 7 Home Basic*, Windows 7 Home Premium*, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows 7 Ultimate Edition 32*, Windows 7 Ultimate Edition 64* Windows Vista or Windows XP

Available USB port for the receiver
CD-ROM Drive

*This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

System Requirements	Product Safety	UL; CSA /TUV (Europe only); CE Mark
	Ergonomics	ANSI; ISO (Europe only); GS Mark (Germany only)
	EMC	FCC; CISPR; ACA; BSMI; MIC; VCCI
	CE Mark	EN 55022:1998; EN 55024
	Design Guidelines for PCs	PC 99 - connector overmold colors; PC 2001 - full functionality
	Telecom	All local telecom requirements and approvals for intended markets
	USA	FCC Part 15 Equipment Certificate; CFR 47, Part 15; other local requirements
	Country Support	US, Belgium, Switzerland, Spain, Denmark, Netherlands, France, Germany, Italy, Portugal, Sweden, Norway, Finland, UK, Poland, Czech Republic, Turkey, Greece, Austria, Bulgaria, Cyprus, Estonia, Hungary, Ireland, Latvia, Lithuania, Luxemburg, Malta, Romania, Slovakia, Slovenia, Vietnam, HK, Australia, NZ, Malaysia, Singapore, Indonesia, Philippines, and Thailand.

HP PS/2 Optical Mouse

Dimensions (H x L x W)	1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)
Weight	4.44 oz (126 g)
Operating temperature	-32° to 104°F (0° to 40° C)

Technical Specifications - Input/Output Devices

	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non condensing at ambient)
	Non-operating humidity	10% to 90% (non condensing at ambient)
Environmental	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face
	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
Electrical	System consumption	PS/2 mini-din connector
	ESD	CE level 4, 15 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC99 - 2001	Functionally compliant
	Resolution	400 ± 20% DPI
	Tracking speed	10 in/s (25.4 cm/s) maximum
	Acceleration	100 in/s/s (2.54 m/s/s)
	Switch actuation	61 g nominal peak force
Mechanical	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s
	Cable length	6 ft (1.8 m)
	Microsoft PC99 - 2001	Mechanically compliant
	Width	8 mm
	Diameter	1.01 in (25.6 mm)
Scroll wheel	Maximum rotation speed	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	1 million operations
	Mechanical life	Minimum 200,000 revolutions
Regulatory Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	

Technical Specifications - Input/Output Devices

HP USB Optical Mouse

Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
Weight	0.27 lb (0.12 kg)
Cable length	72.8 in (185 cm)
System requirements	Available USB port

HP USB Laser Mouse

Scroll Wheel	24
Maximum Rotation Speed	48 rats/sec
Switch Type	Wheel
Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
Environmental	Operating Temperature 32° to 104° F (0° to 40° C) Non-operating Temperature -4° to 140° F (-20° to 60° C) Operating Humidity 10% to 90% (non-condensing at ambient) Non-operating Humidity 20% to 80% (non-condensing at ambient) Operating Shock 40 g, six surfaces Non-operating Shock 80 g, six surfaces Operating Vibration 2-g peak acceleration Non-operating Vibration 4-g peak acceleration
Electrical	Operating Voltage + 5VDC ± 5% Power Consumption MTBF > 150,000 hrs ESD IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV EMI-RFI FCC Class B PC98 PC 99 Compliant
Mechanical	Resolution 800dpi Tracking Speed 25 cm/sec Acceleration 0.5mm Switch Actuation 0.6N (60gf)

Technical Specifications - Input/Output Devices

Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
Cable Length	1850mm
PC98-99	PC99 compliant

Regulatory Approvals UL60950-1, UL 94, UL 746 (A-E), UL 796
TUV/GS: EN 60950-1, EN 60825-1
FCC Class B, UL 1950, cUL, TUV GS, CE, C-tick, VCCI, BSMI, RRL

HP USB PS/2 Washable Mouse

Dimensions (H x L x W) 1.56 x 2.44 x 4.61 in (3.95 x 6.21 x 11.7 cm)

Weight 4.44 oz (126 g)

Environmental	Operating temperature	-32° to 104°F (0° to 40° C)
	Non-operating temperature	-4° to 140°F (-20° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	10% to 90% non-condensing
	Operating shock	40 g, 6 surfaces
	Non-operating shock	80 g, 6 surfaces
	Operating vibration	2 g peak acceleration
	Non-operating vibration	4 g peak acceleration
	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face

Electrical	Operating voltage	5 VDC ± 10%
	Power consumption	100mA
	System consumption	PS/2 mini-din connector or USB
	ESD	CE level 2 8 kV air discharge
	EMI-RFI	Conforms to FCC rules for a Class B computing device

Mechanical	Microsoft® PC99 – 2001	Functionally compliant
	Resolution	1000 ± 20% DPI
	Tracking speed	14 in/s (35.56 cm/s) maximum
	Acceleration	2 g
	Switch actuation	70 g nominal peak force
	Switch life	3,000,000 operations (using Hasco modified tester)
	Switch type	Low force micro-switches
	Cable length	8.8 ft total 70 cm+ 2m extension
	Microsoft PC99 – 2001	Mechanically compliant

Scroll wheel	Width	6 mm
	Diameter	1 in (25.4 mm)
	Maximum rotation speed	48 rats/sec
	Switch type	Light force micro-switch
	Switch life	3 million operations
	Mechanical life	Minimum 200,000 revolutions

Regulatory approvals Compliant FCC, CE Mark, ICES-003-B, IP66/NEMA4X

Compatibility Operating system Windows 7, Windows Vista Business 64*, Windows Vista Business 32*



Technical Specifications - Input/Output Devices

support

Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32* (No driver is required for this device. Native support is provided by the operating system.), xpe, ce.net, Linux, XP-64

* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Technical Specifications – Power

Unit Environment and Operating Conditions

General Unit Operating Guidelines

- Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.
- Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.
- Never restrict airflow into the computer by blocking any vents or air intakes.
- Do not stack computers on top of each other or place computers so near each other that they are subject to each other's re-circulated or preheated air.
- Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.
- If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.

Temperature Range	Operating: 50° to 95° F (10° to 35° C)* Non-operating: -22° to 140° F(-30° to 60° C)
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)

*Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/Hr. The upper limit may be limited by the type and number of options installed.

Power Supply

	SFF	MT
Standard Efficiency	240W active PFC	320W active PFC
High Efficiency*	240W active PFC 87/90/87% efficient @ 20/50/100% load	320W active PFC 87/90/87% efficient @ 20/50/100% load
Operating Voltage Range	90 - 264 VAC	
Rated Voltage Range	100 - 240 VAC	
Rated Line Frequency	50/60 Hz	
Operating Line Frequency Range	47 – 63 Hz	
Rated Input Current	4A	5.5A
Rated Input Current with Energy Efficient* Power Supply	4A	5.5A
Current Leakage (NFPA 99)	< 275 µA	< 450 µA
Power Supply Fan	92mm variable speed	
Power cord length	6.0 ft. (1.83 m)	
Total Cord Length	N/A	N/A

*High efficiency power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules

Technical Specifications – Weights & Dimensions

Weights & Dimensions

(configured with 1 HDD & 1 ODD)

	SFF	MT
Chassis (H x W x D)	4.0 x 13.3 x 14.9 in 100 x 338 x 379 mm	14.9 x 7.0 x 17.0 in 377 x 177 x 431 mm
System Volume	790.3 cu in 13.0 L	782.77 cu in 12.8 L
System Weight*	16.7 lb 7.6 kg	20.5 lb 9.3 kg
Max Supported Weight (desktop orientation)	77.0 lb 35.0 kg	N/A
Tower Stand (H x W x D)	1.1 x 7.0 x 7.9 in (29 x 178 x 200 mm)	N/A
Packaging (H x W x D)	9.0 x 19.8 x 23.4 in 229 x 500 x 594 mm	11.6 x 19.7 x 23.2 in 295 x 500 x 590 mm
Shipping Weight*	17.9 lb 8.1 kg	28.8 lb 13.1 kg
Palletization Profile	4-units per layer 10-layer max. 40-units per pallet	4-units per layer 8-layer max. 32-units per pallet

Technical Specifications – Miscellaneous Features

Management Features

- Advanced Configuration and Power Management Interface (ACPI). Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.
- Intel Wired for Management support; industry wide initiative to make Intel architecture based PCs, servers and mobile computers more inherently manageable out-of-the-box and over the network
- Dual State Power Button; acts as both an on/off button and a suspend-to-sleep button

Serviceability Features

- Dual colored power LED on front of computer to indicate either normal or fault condition
- Diagnostic LED Explanation Table:
 - Number of 1-second red LED blinks followed by a 2-second pause, then repeats:
 - 2 - processor thermal protection activated
 - 3 - processor not installed
 - 4 - power supply failure
 - 5 -- memory error
 - 6 - video error
 - 7 - PCA failure (ROM detected failure prior to video)
 - 8 - invalid ROM, bootblock recovery mode
 - 9 - system not fetching code
 - 10 - system hang while loading an option ROM
- System/Emergency ROM
- Flash ROM
- CMOS Battery Holder for easy replacement
- Flash Recovery with Video Configuration Record Software
- 5 Aux Power LED on System PCA
- Processor ZIF Socket for easy Upgrade
- Over-Temp Warning on Screen (Requires IM Agents)
- Clear Password Jumper
- DIMM Connectors for easy Upgrade
- Clear CMOS Button
- NIC LEDs (integrated) (Green & Amber)
- Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions
- Color coordinated cables and connectors
- Tool-less Hood Removal
- Front power switch
- System memory can be upgraded without removing the system board or any internal components
- Tool-less Hard Drive, CD & Diskette Removal
- Green Pull Tabs, and Quick Release Latches for easy Identification

Technical Specifications – Miscellaneous Features

Additional Features

Towerable Orientation

Product can be oriented as either a desktop or a tower

Drive Lock

Implementation of the industry standard ATA Security feature set. When enabled, it prevents software access to user data on the drive until one or two user-defined passwords are provided.

DPS Access through F10 Setup during Boot

Drive Protection System

A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user

Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced

The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures

SMART Technology (Self-Monitoring, Analysis and Reporting Technology)

Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted

SMART I - Drive Failure Prediction

Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count

SMART II - Off-Line Data Collection

By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure

SMART III - Off-Line Read Scanning with Defect Reallocation

IOEDC: I/O Error Detection Circuitry

SMART IV - End-to-End CRC for hard drives

Detects errors in Read/Write buffers on HDD cache RAM

Interface in F10 setup provides confirmation of SMART IV support.

After-Market Options (availability may vary by region)

Communication Devices

	Part Number
Intel Gigabit CT Desktop NIC (PCIe x1)	FH969AA
Broadcom NetXtreme GbE Ethernet Plus NIC (PCIe x1)	FS215AA
HP Wireless 802.11 b/g/n NIC (PCIe x1)	FH971AA

Graphics Solutions

	Part Number
AMD Radeon HD 6350 Graphics (PCIe x16)	QK638AA
AMD Radeon HD 7450 Graphics Card	B1R44AA
Nvidia NVS 300 Graphics (PCIe x16)	BV456AA
Nvidia NVS 310 Graphics (PCIe x16)	A7U59AA
HP DisplayPort Cable Kit	VN567AA
HP DisplayPort To Dual Link DVI-D Adapter	NR078AA
HP DisplayPort To DVI-D Adapter	FH973AA
HP DisplayPort to HDMI Adapter	BP937AA
HP DisplayPort to VGA Adapter	AS615AA
HP DMS-59 to Dual DVI Cable	DL139A
HP DMS-59 to Dual DisplayPort Adapter	XP688AA

Data Storage Drives and Accessories

	Part Number
HP 300GB 10K rpm SATA 3.0Gb/s 2.5" Hard Disk Drive Includes 3.5"adapter	FM802AA
HP 500-GB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	QK554AA
HP 1-TB 7.2K rpm SATA 6.0Gb/s 3.5" Hard Disk Drive	QK555AA
HP 160-GB SATA 3.0Gb/s Solid State Drive	BW321AA
HP eSATA Adapter	FH966AA
HP Removable SATA Hard Drive Enclosure (frame & carrier)	RY102AA
HP Removable SATA Hard Drive Enclosure (carrier only)	RY103AA

Input Devices

	Part Number
HP PS/2 Standard Keyboard	DT527A
HP USB Standard Keyboard	DT528A
HP USB Keyboard with USB ports	BT330AA
HP USB Gray Keyboard	DT529A
HP USB Smart Card (CCID) Keyboard	BV813AA
HP USB Keyboard and Mouse Kit	RC465AA
HP USB Washable Keyboard	VF097AA
HP USB and PS/2 Washable Mouse	BM866AA
HP USB and PS/2 Washable Keyboard and Mouse Kit	BU207AA
HP PS/2 Optical Mouse	EY703AA
HP USB Optical Mouse	DC172AT
HP USB Laser Mouse	GW405AT
HP USB Travel Mouse	RH304AA
HP Wireless Keyboard and Mouse Combination	NB896AA

After-Market Options (availability may vary by region)

System Memory

HP 2 GB DIMM
HP 4 GB DIMM

Part Number
AT024AA
VH638AA

Multimedia Devices

HP Thin USB Powered Speakers
HP DVD-ROM Drive
HP SuperMulti DVD Writer Drive
HP Blu-ray Writer Drive
HP USB HD 720P Business Webcam
HP Business Headset

Part Number
KK912AA
AR629AA
AR630AA
AR482AA
QP896AA
QK550AA

Removable Media Storage

HP USB External Diskette Drive
HP 22-n-1 Media Card Reader

Part Number
DC141B
AR941AA

Security Devices

HP/Kensington MicroSaver Cable Lock
HP Business PC Security Lock
HP SFF Solenoid Lock and Hood Sensor
HP MT Solenoid Lock and Hood Sensor
HP SFF Wall Mount/Security Sleeve
HP Keyed Lock Cable

Part Number
PC766A
PV606AA
BP428AA
DE618A
VN570AA
BV411AA

Stands and Accessories

HP Integrated Work Center Stand (SFF)
HP SFF Tower Stand
HP Serial Port Adapter (RS-232 compatible)
HP Parallel Port Adapter
HP 5.25" Blank Bezel Kit (50 pack)
HP FireWire IEEE 1394 Card

Part Number
QK549AA
VN569AA
PA716A
KD061AA
DC177B
PA997A

After-Market Options (availability may vary by region)

LANDesk Software (E-Delivery)

Part Number

LANDesk Management Suite License - 1-499 Nodes E-Delivery	QY369AAE
LANDesk Management Suite License - 500-999 Nodes E-Delivery	QY370AAE
LANDesk Management Suite License - 1000-1999 Nodes E-Delivery	QY371AAE
LANDesk Management Suite License - 2000-4999 Nodes E-Delivery	QY372AAE
LANDesk Management Suite License - 5000-9999 Nodes E-Delivery	QY373AAE
LANDesk Security Suite License E-Delivery	QY379AAE
LANDesk Management Suite 1 Year Maintenance - 1-499 Nodes E-Delivery	HZ825AAE
LANDesk Management Suite 1 Year Maintenance - 500-999 Nodes E-Delivery	HZ826AAE
LANDesk Management Suite 1 Year Maintenance - 1000-1999 Nodes E-Delivery	HZ827AAE
LANDesk Management Suite 1 Year Maintenance - 2000-4999 Nodes E-Delivery	HZ828AAE
LANDesk Management Suite 1 Year Maintenance - 5000-9999 Nodes E-Delivery	HZ829AAE
LANDesk Security Suite 1 Year Subscription	HZ830AAE
LANDesk Patch Management 1 Year Subscription - 1-499 Nodes E-Delivery	HZ831AAE
LANDesk Patch Management 1 Year Subscription - 500-999 Nodes E-Delivery	HZ832AAE
LANDesk Patch Management 1 Year Subscription - 1000-1999 Nodes E-Delivery	HZ833AAE
LANDesk Patch Management 1 Year Subscription - 2000-4999 Nodes E-Delivery	HZ834AAE
LANDeskPatch Management 1 Year Subscription - 5000-9999 Nodes E-Delivery	HZ835AAE

Copyright © 2012 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

May 2012